


INFINITY NV-3508/3516-H2/8P

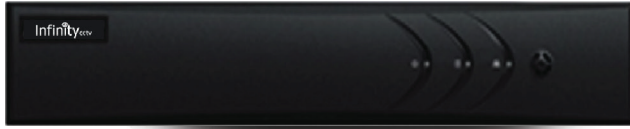

Key Feature

- Third-party network cameras supported
- Up to 6 Megapixels resolution recording
- HDMI and VGA output at up to 1920x1080P resolution
- 8/16-ch network cameras can be connected with 80M/160M incoming bandwidth
- Up to 2 SATA interfaces
- Plug & Play with up to 16 independent PoE network interfaces
- Support network detection, including network delay, packet loss, etc

Specification

Model	NV-3508/3516-H2/8P	
Video/Audio input	IP video input	8/16-ch
	Two-way audio input	1-ch, RCA (2.0 Vp-p, 1kΩ)
Network	Incoming bandwidth	80/160Mbps
	Outgoing bandwidth	80Mbps
	Remote connection	128
Video/Audio output	Recording resolution	6MP/5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
	Frame rate	Main stream: 50 fps (P) / 60 fps (N) Sub-stream: 50 fps (P) / 60 fps (N)
	HDMI/VGA output	1-ch, resolution: 1920 × 1080 /60Hz, 1600 × 1200 /60Hz, 1280 × 1024 /60Hz, 1280 × 720 /60Hz, 1024 × 768 /60Hz
	Audio output	1-ch, RCA (Linear, 1kΩ)
Decoding	Live view / Playback resolution	6MP/5MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
	Capability	8-ch@720P, 6-ch@1080P/16-ch@4CIF, 12-ch@720P, 6-ch@1080P
Hard disk	SATA	2 SATA interfaces for 2 HDDs
	Capacity	Up to 4TB/6TB for each disk
External interface	Network interface	1 RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interface
	USB interface	1 × USB 2.0 and 1 × USB 3.0
	Alarm in/out (Optional)	4/1
PoE	Interface	8 independent 100 Mbps PoE network interfaces
	Max. Power	120W
	Supported standard	AF and AT
General	Power supply	100~240V AC
	Consumption (without hard disk and PoE)	≤10/≤15W
	Working temperature	-10 °C ~ +55 °C (+14 °F ~ +131 °F)
	Working humidity	10 % ~ 90 %
	Chassis	19-inch rack-mounted 1U chassis (NV-3508-H2/8P), 380 chassis (TDV-3516-H2/8P)
	Dimensions (W × D × H)	380 × 290 × 48mm (15.0" × 11.4" × 1.9")
Weight (without hard disk)	≤ 1 kg (2.2 lb)	